




Deze download wordt u gratis aangeboden door Pick-upnaalden.nl

Web : www.pickupnaalden.com
Email : info@pick-upnaalden.nl
Facebook : www.facebook.com/pickupnaalden
Twitter : twitter.com/Pickupnaalden
Google+ : https://plus.google.com/+FCaris_pickupnaalden



FULLY AUTOMATIC TURNTABLE

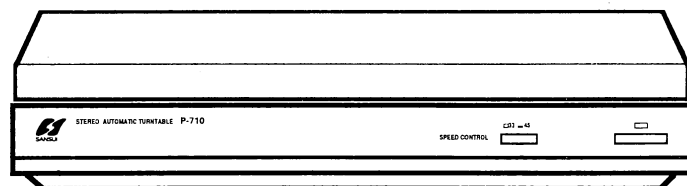


SS	Manufactured for Saudi Arabian market.
XX	Standard Version.
<EXPORT>	
NON MARK	Common Parts.

Type	Belt drive system
Rated speeds	33-1/3, 45 rpm
Platter	300 mm (11-13/16") diameter
Motor	DC servo motor
Wow/flutter	0.25% (WRMS)
Signal-to-noise ratio	Better than 45 dB (DIN-B)
Dimensions	420 mm (16-1/2") 114 mm (4-1/2") 350 mm (13-13/16")
Weight	2.2 kgs (4.9 lbs.) net


Output voltage	2.5 mV (1,000 Hz, 3.54 mm/sec.)
Correct load impedance	47 kohms
Frequency response	20—22,000 Hz
Stylus	0.6 mil diamond stylus (SN-373 replacement stylus)

- Design and specifications subject to change without notice for improvements.


1. WIRING DIAGRAM

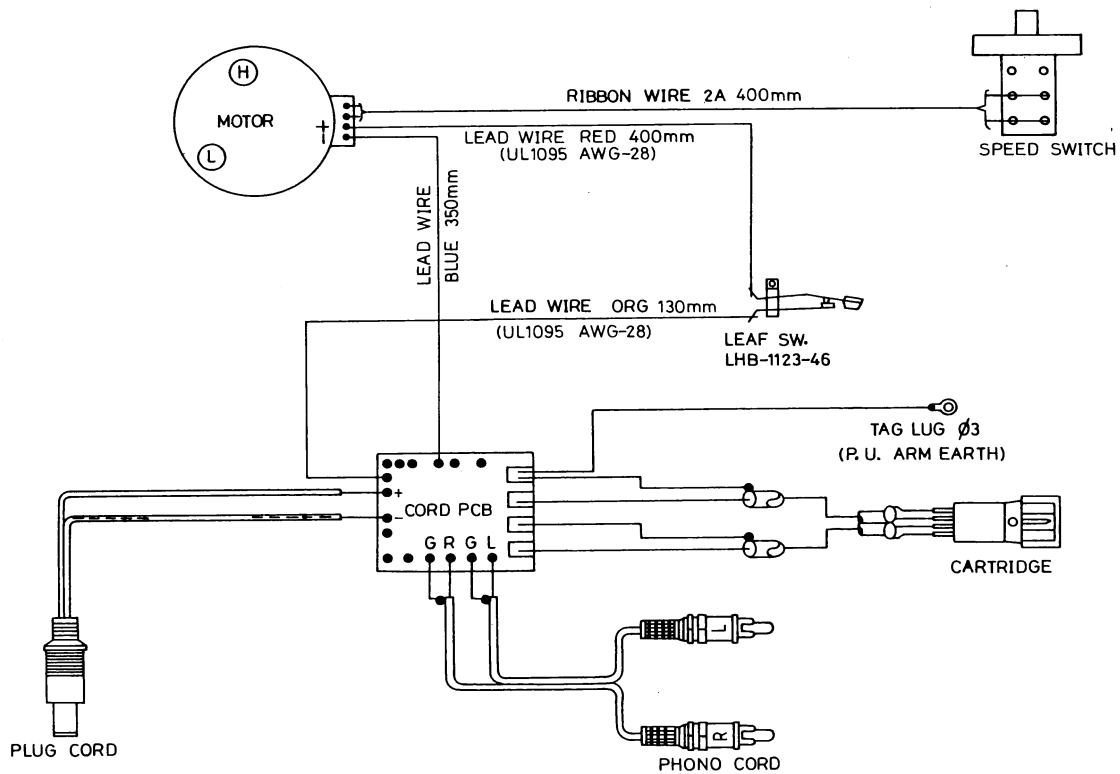

2. SCHEMATIC DIAGRAM

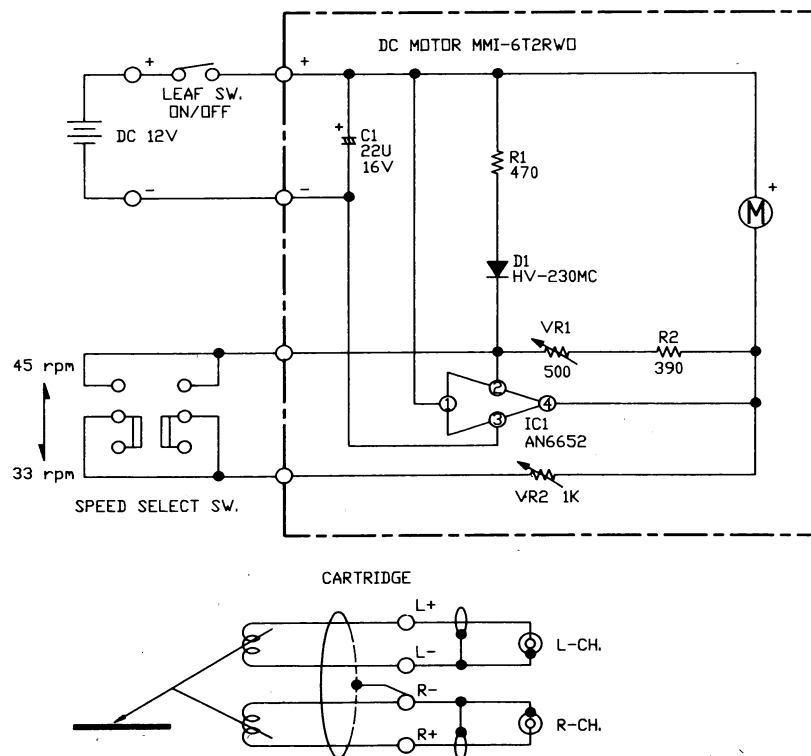

3. MECHANICAL EXPLODED VIEW

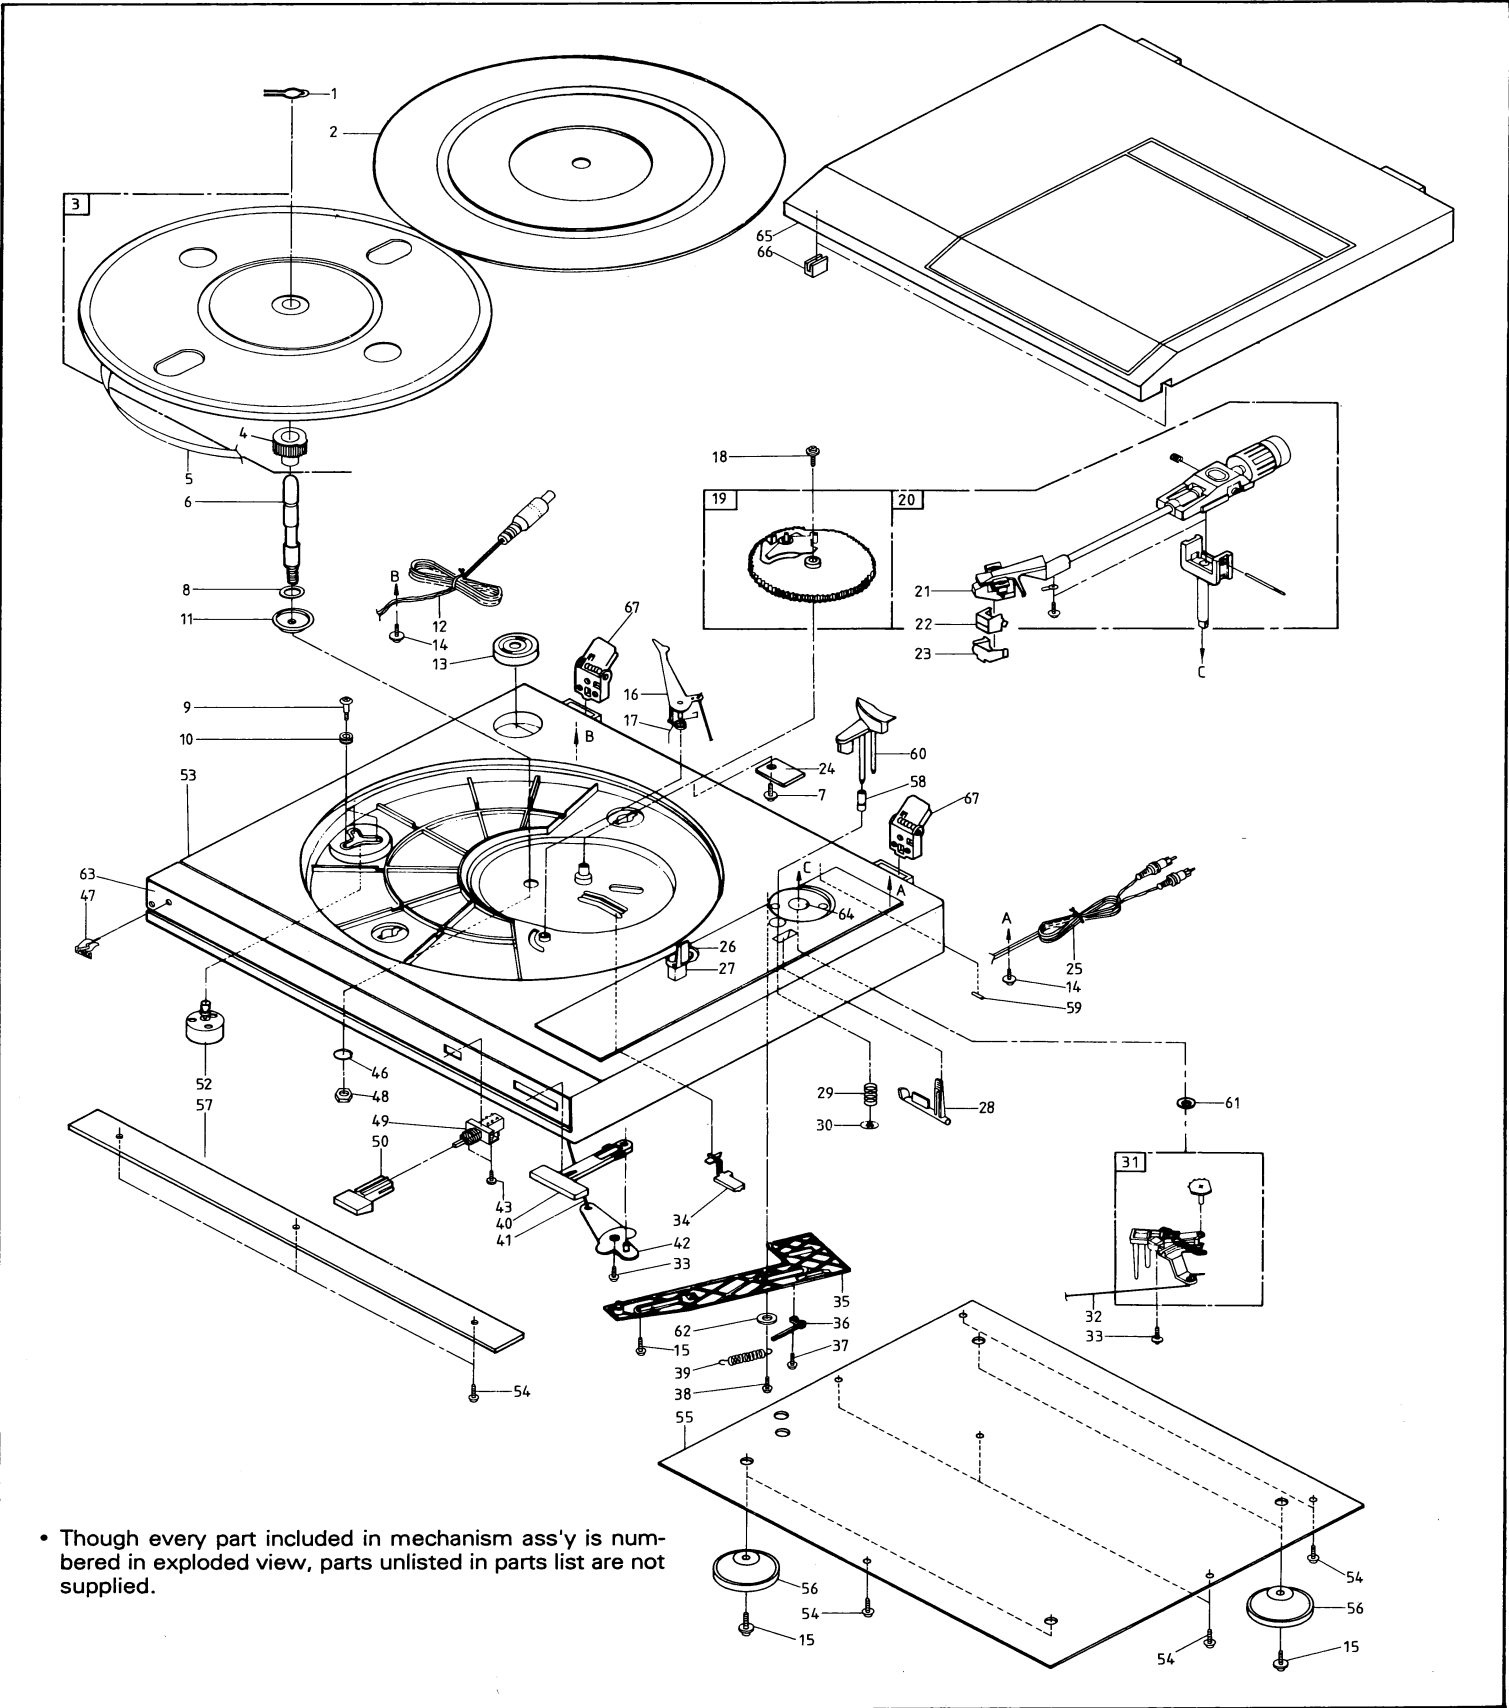


4. PARTS LIST OF UNIT

Ref. No.	Part No.	Description
1	1006005025	Spindle Clip
2	0003102586	Turntable Mat Assembly
3	0002104291	Turntable Assembly
(4)	2024000278	Turntable Gear
5	2002005015	Turntable Belt
6	2081000500	Turntable Spindle
7	8791300800	7 (Taptite-P) BRAZ 3008 ZN3A
8	2056000278	Poly Washer
9	2015000284	Screw
10	2065100278	Grommet (A)
11	3004100466	Flat Washer (5.2x18x1t)
12	4510055200	Plug Cord 1350mm 5.5x2
13	1009000080	Turntable Adaptor
14	0004100492	Screw Assembly
15	8761301012	7 (Taptite-P) CUP 3010 WF12 ZN3A
16	2016005025	Reject Lever
17	2021005025	Reject Spring
18	8761300810	7 (Taptite-P) CUP 3008 WF10 ZN3A
19	0002005025	Cam Gear Assembly
20	0002104144	Pick Up Arm Assembly
21	1034000289	Cartridge Assembly (AT-3600L)
22	1045000289	Stylus (SN-373)
23	1046000289	Cartridge Cover
25	5620809509	Phono Cord 950mm
26	1004100520	P.U. Tube Hook
27	1003100874	P.U. Rest
28	1015005015	Cue Lever
29	2003005016	Viscous Spring
30	2000000631	Push Nut 3x
31	0004100993	Return Link Assembly

Ref. No.	Part No.	Description
32	2004005025	Trip Rod
33	8761300812	7 (Taptite-P) CUP 3008 WF12 ZN3A
34	2019105025	Trip Lever
35	2001005025	Slide Arm
36	4406010046	Leaf Switch LSB-1123-46
37	8711200600	7 (Taptite-P) PAN 2006 ZN3A
38	2004100497	Slide Arm Screw 3x14 12D
39	2009105025	Slide Arm Spring
40	1003101249	Stop Knob
42	2009000037	Control Lever
43	8761301008	7 (Taptite-P) CUP 3010 WF08 ZN3A
46	2004100487	Spring Washer
47	J527833300	Sansui Badge
48	3032100050	Nut 50 ZN3A
49	4430222507	Push Switch (SPUF12AF06)
50	1003101250	Speed Knob
52	C022000302	Motor Assembly (MMI-6T2RWO)
54	8762301008	7 (Taptite-P) CUP 3010 WF08 ZN3K
56	2003105015	Foot
58	2017005015	Viscous Shaft
59	2002001306	Securing Rubber
60	1003100652	Lift Platform
61	3025921304	Poly Washer 8x13x0.4t
62	3021210011	Flat Washer
63	1002104383	Front Overlay
64	1004100657	P.U. Hinge Collar
65	0067075556	Dust Cover Assembly
66	2000000978	Dust Cover Stopper
67	2000000893	Hinge


5. PACKING & ACCESSORY LIST

Ref. No.	Part No.	Description
1	9004104548	Poly Bag (56x72cm)
2	9001101197	Snow Box (R)
3	9001101195	Snow Box (L)
4	9002104413	Gift Box
	9004104532	Instruction Book
	9004104549	Poly Bag (23x40cm)
	1009000080	Turntable Adaptor

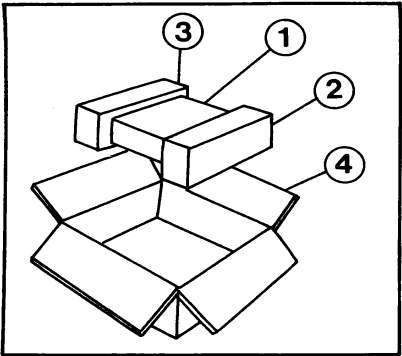


6. SPEED ADJUSTMENT

1. Set the speed switch to 33 rpm and adjust the VR1 on the speed control board so that the 33 rpm strobo pattern is seen stop.
2. Set the speed switch to 45 rpm and adjust the VR2 on the speed control board so that the 45 rpm strobo pattern is seen stop.



7. LEAD-IN ADJUSTMENT

1. Adjust the lead-in adjusting cam gear while pushing the driver a little so that the stylus tip may come down to the center of the lead-in groove. (Turn to counterclockwise the cam gear, so it will be later.)

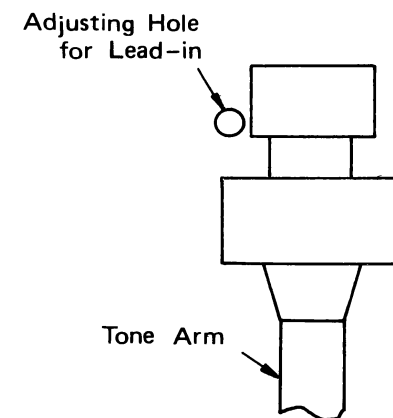

SANSUI

SANSUI ELECTRIC CO, LTD.:

New River Building, 10-14, Shinkawa 1-chome, Chuo-ku Tokyo 104, Japan
PHONE:(03)5566-1024 FAX:(03)5566-1027 (International Division)

SANSUI USA INC.:

1290 Wall Street West, Lyndhurst, New Jersey 07071 U.S.A.

SANSUI DEUTSCHLAND GMBH:

17150 South Margay Ave, Carson, California 90746 U.S.A.

山水電気株式会社

Paul Ehrlich Strasse 8. 6074 Rödermark 2, F.R. Germany
東京都中央区新川 1-10-14 (〒104)